

Agora

meeting cubicle

Technical Data

- TV stand - steel, max size of 32-70", max weight 50 kg; equipped with cable cover;
- Worktop - MFC 28 mm, ABS edge;
- Natural wood - ash, with metal element, powder coated, coated with transparent varnish, profile 40 × 40 mm, spacer 10 mm between top and frame;
- Leveling - 10 mm range;
- Screen - wooden frame, upholstered;
- Seat, backrest - moulded foam, upholstered;
- Base - Ø25 mm, wall thickness 1.5 mm, powder coated;
- Legs - finished with polypropylene feet in frame colour



Guarantee

.mdd products - 5 years.
Electrical components and fabric - 2 years.

Selected configuration

AR08B

Fabric: Mica - 100% polyester

Panel colour: MC-2497-62048 Olive


Seat colour: MC-2496-62093 Light olive

Frame: Black semi-matt RAL 9005

TV Stand: No

Table: No

Weight: 170.86kg

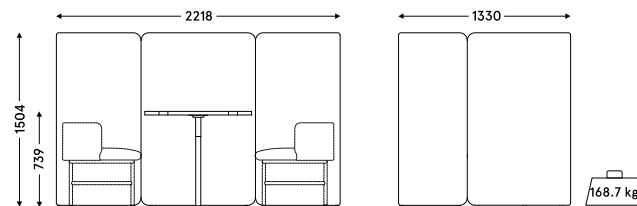

Certificates



Sustainability

- Some of the available upholstery fabrics are made from post-consumer recycling.
- Sustainable production - we are not indifferent to the environmental impact of our furniture, therefore we provide the essential information on the lifecycle of our products via the Environmental Product Declaration.
- Steel profiles are powder-coated to reduce the emission of Volatile Organic Compounds.


Fabric technical data

Mica



Material	post-consumer recycled polyester 97%, polyester 3%
Weight	305g/m2
Abrasion resistance rub	60,000 cycles Martindale, EN ISO 12947-2
Colour fastness to light	scale 1-8, max. 8 - EN ISO 105-B02, 5-8
Pilling resistance	scale 1-5, max. 5 - EN ISO 12945-2 EN ISO 12945-2, 4-5
Colour fastness to rubbing	dry: 4-5, wet: 4-5, scale 1-5, max. 5 - EN ISO 105x12
Flammability	CA TB 117-2013 ASTM E 84 class I BS EN 1021-1 cigarette BS EN 1021-2 Match BS 476 part 7 class I

Mica



Material	post-consumer recycled polyester 97%, polyester 3%
Weight	305g/m2
Abrasion resistance rub	60,000 cycles Martindale, EN ISO 12947-2
Colour fastness to light	scale 1-8, max. 8 - EN ISO 105-B02, 5-8
Pilling resistance	scale 1-5, max. 5 - EN ISO 12945-2 EN ISO 12945-2, 4-5
Colour fastness to rubbing	dry: 4-5, wet: 4-5, scale 1-5, max. 5 - EN ISO 105x12
Flammability	CA TB 117-2013 ASTM E 84 class I BS EN 1021-1 cigarette BS EN 1021-2 Match BS 476 part 7 class I