

Product sheet

Baltic Remix

chair swivel base

Technical Data

- Seat: polypropylene + cushion - moulded foam, density, of 50kg/m³, upholstered;
- Base BL3P13: 4-star, metal, powder coated, swivel seat - 360°, legs made of tube Ø22 mm, polypropylene feet;
- Base BL3P13K: 4-star, metal, powder coated, swivel seat - 360°, legs made of tube Ø22 mm, castors for soft floors, extra charge - castors for hard floors;
- Base BL3P19: 4-star, aluminum, powder-coated, swivel seat - 360°, aluminium cast, legs finished with polypropylene feet; option with extra charge: polished aluminium;
- Base BL3P19K: 4-star, aluminum, powder coated, swivel seat - 360°, aluminium cast, castors for soft or hard (extra charge) floors; option with extra charge: polished aluminium;
- Dimensions: 530 x 540 mm, h: 760 mm / 750 mm

Selected configuration

BL3P13

Frame: Burgundy semi-matt RAL 3007


Fabric: Go Check - 100% Trevira

Colour: G-60080 Dark grey

Footers: Black

Colour: Burgundy RAL 3007

Weight: 10.9kg

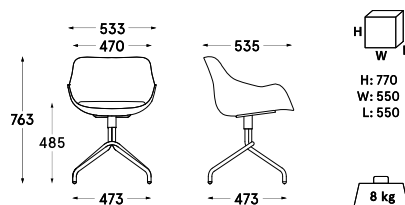

Guarantee

.mdd products - 5 years.

Electrical components and fabric - 2 years.

Certificates



Sustainability


- Elements that do not need our standards are processed into re-granulate and reused for the production of polypropylene seats.
- Upholstered Baltic Soft Duo and Classic chairs are made using seats created during the change of granulate colours in the injection moulding machine.
- Basic, Remix and Classic versions are made without upholstery staples. Fewer elements mean it is easier to

reassemble and recycle the chair.

- The cushion in Baltic Remix and Classic is fixed mechanically, with no need to glue it. As the foam is not glued, it is easy to separate it from the polypropylene inlay. That simplifies the recycling process.
- Sustainable production – we are not indifferent to the environmental impact of our furniture, therefore we provide the essential information on the life cycle of our products through the Environmental Product Declarations (EPD).

Fabric technical data

Go Check

	Material	100% Trevira CS
	Weight	435g/mb
	Abrasion resistance rub	60,000 cycles Martindale, EN ISO 12947-2
	Colour fastness to light	scale 1-8, max. 8 - EN ISO 105-B02, 5-8
	Pilling resistance	scale 1-5, max. 5 - EN ISO 12945-2, 5
	Colour fastness to rubbing	dry: 4-5, wet: 4-5, scale 1-5, max. 5 - EN ISO 105x12
	Flammability	BS EN 1021 1 i 2 cigarette, match BS EN 1021-1 cigarette BS 5852 Crib 5 BS 7176 medium hazard