





Installation Method

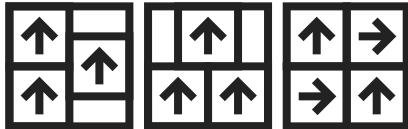

Ashlar Brick Non Directional



Quarter turn Monolithic

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see www.interface.com/disclaimer.

Product Ridge **Colour** Agate **Collection** Fresco Valley Collection

Product Specifications

| | |
|----------------------|---|
| Product Number | A023 |
| Product Construction | High Performance Luxury Vinyl Tile contains 39% Pre-Consumer Recycled Content |
| Finish | CERAMOR+™ UV Stabilised Ceramic Bead Coating |
| Wear Layer Thickness | (EN ISO 24340) 0.55 |
| Total Thickness | (EN ISO 24346) 4.5mm |
| Total Weight | 6,880 g/m ² |
| Size | 50cm x 50cm |
| Tiles per Box | 10 - 2.5m ² |
| Backing | Sound Choice™ Acoustic Backing |

Performance Specifications

| | |
|--|--|
| Wear Classification | EN ISO 10874 33 Heavy Commercial / 42 General Light Industrial |
| CE Declaration Of Performance | DOP PBRG-AHCK3R |
| UKCA Declaration of Performance | DOP PBRG-AHCK3R |
| Castor Chair Rating | (ISO 4918 / EN425) Pass |
| Flammability | (EN ISO 9239-1) Euroclass Bfl-s1 (EN 13501-1) |
| Light Fastness | ≥7 (ISO 105-B02) |
| Dimensional Stability | (ISO 23999) ≤ 0.25 % |
| Curling | ≤ 2 mm (ISO 23999) |
| Flexibility | (EN ISO 24344) Method A - Pass |
| Abrasion Resistance | (EN 660-2) Group T |
| Residual Indentation | ≤0.2mm |
| Determination of Anti-Slip | R10 (EN 16165 - Annex B) |
| Pendulum Dry 4S | 36+ Low Slip Potential (EN 16165 - Annex C) |
| Chemical Resistance | (EN ISO 26987) Very Good |
| Impact Sound Insulation ΔLw EN ISO 10140-3 | 16 dB |


Environmental Specifications

| | |
|-----------------------------------|---|
| Environmental Product Declaration | Download EPD |
| Total Recycled Content | 39 % |
| Indoor Air Quality | French A+ Indoor Air Comfort GOLD® LVT Greenguard Gold M1 Emission Certification - LVT |
| Embodied Carbon (Cradle to Gate) | 9.2 kg CO ₂ eq./m ² |
| Full Life Cycle Carbon | Certified Carbon Neutral Floors™ |
| Fully Recyclable | Can be recycled into carpet tile backing. |
| Material Composition | Free of Ortho Phthalates |

Technical Information

| | |
|--------------|---|
| Installation | See recommended LVT installation guidelines |
| Maintenance | See recommended LVT maintenance guidelines |

Certifications



EN ISO 10874 33 Heavy Commercial / 42 General Light Industrial



(ISO 4918 / EN425) Pass



(EN ISO 9239-1) Euroclass Bfl-s1 (EN 13501-1)



≥ 7



(ISO 23999) ≤ 0.25 %



(EN ISO 24344) Method A - Pass



≤0.2mm



(EN 660-2) Group T



(EN ISO 26987) Very Good



Yes



Yes



French A+



0.03

CE

17

Interface European Manufacturing B.V.
Industriestraat 15
5255 BD
Schijndorp
The Netherlands

DOP PSRG – AIICKR

EN 14041:2004
Notified Body – 0459

Relevant for covering for installation:
Classification: Class B042 (See EN ISO 9001)
Reaction to fire: Class B0 (See EN ISO 14041, clause 4.1)
Spontaneous Combustion: Class D3 (See EN 14041, clause 4.2)
Flammability: Class E1 (See EN 14041, clause 4.3)
Acoustic: < 2.300 (See EN 14041, clause 4.4.1)

www.interface.com/Interface

LVT

**UK
CA**

21

Interface European Manufacturing B.V.
Industriestraat 15
5255 BD
Schijndorp
The Netherlands

DOP PSRG – AIICKR

EN 14041:2004
Approved Body – 0221

Relevant for covering for installation:
Classification: Class B042 (See EN ISO 9001)
Reaction to fire: Class B0 (See EN ISO 14041, clause 4.1)
Spontaneous Combustion: Class D3 (See EN 14041, clause 4.2)
Flammability: Class E1 (See EN 14041, clause 4.3)
Acoustic: < 2.300 (See EN 14041, clause 4.4.1)

www.interface.com/Interface

LVT