



GoBright Connect Product information



The GoBright Connect is a unique – patented – piece of hardware that GoBright has developed itself, at any desk. With the Connect you control your desk and create your own personal space. The Connect has a glass top with LED lighting and is water-resistant. The Connect is a must-have in flexible office environments where hybrid working, activity-based working or hot desking are the norm.



Features

Ad hoc desk booking

Is a desk available? Simply make it yours by scanning the Connect with NFC / RFID card or use the GoBright Mobile App. Ideal in hybrid and hot desking environments.

Checking in/out

Did you book a desk in advance? Check in by scanning the Connect so the entire GoBright platform knows the desk is occupied. And, once you've finished your work, check out via the Connect to free up the desk again.

Desk occupation data

Desk occupation data is collected and can be used to set up the office as efficiently as possible.

Personal settings

Pre-set your personal sitting / standing height. One click on the Connect makes your desk change its height automatically. It is a follow-me system; every desk that you log into will take over your pre-sets. Switching between sitting and standing work is very important for your health. The Connect contributes to a healthy workplace.

“Find my desk”

Use it in the App and the Connect starts flashing to indicate which desk is yours. Once checked in at a desk your colleagues know where to find you using the ‘Find my colleague’ function.

Required accessories



License

Desk manager license per desk



Gateway

Multi gateway Mesh to GoBright platform



Connection cable

Connection cable Linak or USB powered

Optional accessories



Sensor

For reliable analysis data to realise most efficient use of all desks



Glow

For extra visibility on partition walls and monitors



Caddy

Place the Connect on top of a desk, instead of building it in

Desk Status

The LED ring shows the status of a desk:

Green The desk is free and bookable.


Red The desk is occupied and non-bookable.

Blue The desk is occupied and non-bookable and the person at the desk does not want to be disturbed.

Purple The desk needs cleaning.

Hygienic Desk

The color Purple indicates that a desk needs to be cleaned before it can be used again. This way the facility manager can make decisions more effectively regarding the cleaning schedules.

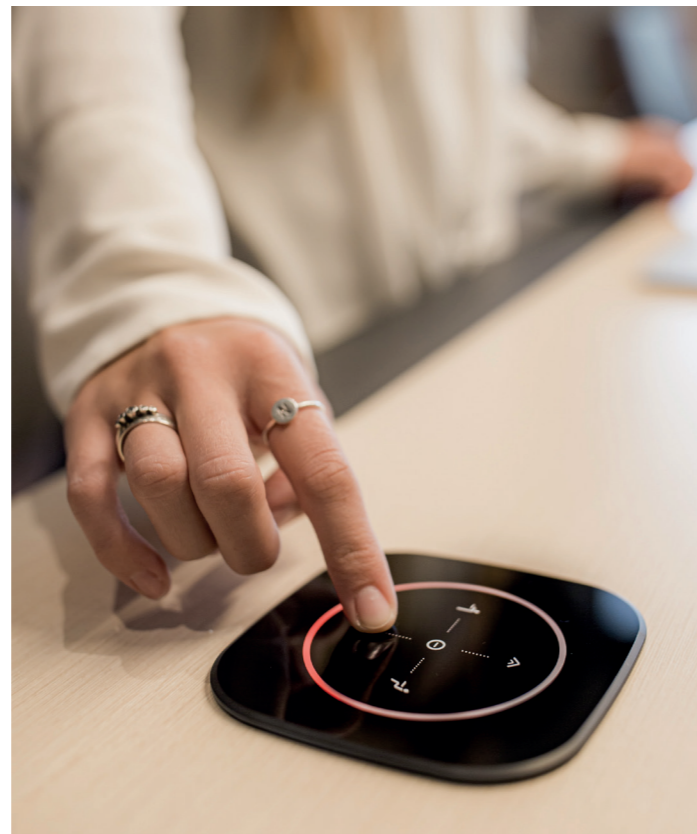

GoBright Caddy


We have developed this additional product especially for the Connect. When using the Caddy it is not necessary to make a hole in the desktop, assembly is a lot faster (especially in offices with hundreds of desks), making it even easier and more flexible to use the Connect.

From front to back, the Caddy rises slightly diagonally, in height. So the Connect is placed at an angle in the Caddy. As a result, the occupancy status of the desks is even better visible from a distance than when the Connect lies flat in the desk.



Functions

| | |
|------------------------|---|
| LED ring | Free (green), Occupied (red), Do not disturb (blue) |
| Sitting button | Go to personal sitting height |
| Standing button | Go to personal standing height |
| Up button | Desk goes up |
| Down button | Desk goes down |
| Middle button | One push: Do not disturb |
| Save settings | Hold the middle button for three seconds and then push sitting or standing button: save personal sitting or standing height |

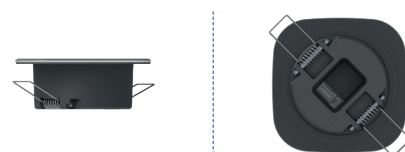

Article number

DCF1-10P GoBright Connect – 10 pack*

Accessories


| | |
|-------------------|---|
| BB-DS+M+A-001 | GoBright desk manager license per desk |
| CC1-LINAK-LP-10p | GoBright connection cable LINAK control box, LINAK powered and control box, 140 cm - 10 pack* |
| CC1-LINAK-USB-10p | GoBright connection cable LINAK control box, USB powered and control box, 140 cm - 10 pack* |
| DOSC1-10P | GoBright desk occupancy sensor, cabled - 10 pack* |
| GLC1-10P | GoBright Glow - 10 pack* |
| MGW211-DP24 | GoBright multi gateway Mesh to GoBright platform |
| MGW211-DP28 | GoBright multi gateway Mesh to GoBright platform PoE |
| CAD1 | Desktop Caddy for GoBright Connect – black |

Technics

| | |
|------------------|---|
| Inputs | 1 input for connection cable, 1 input for GoBright Glow |
| Networking | Mesh networking to GoBright multi gateway |
| Actuator systems | LINAK CBD6S control box, LINAK DL series (with DC T-splitter) |
| NFC/RFID | 13.56 MHz ISO14443-3A(MIFARE), ISO14443-3B(FeliCa), ISO14443-3F and ISO15693, UID reading capable |

Mounting

| | |
|--------------------|-------------------------------------|
| Mounting | In desk, diameter 80 mm |
| Thickness desk top | 12 – 30 mm |
| Dimensions Connect | 102 mm x 102 mm x 37 mm (L x W x H) |
| Installation depth | 35 mm |

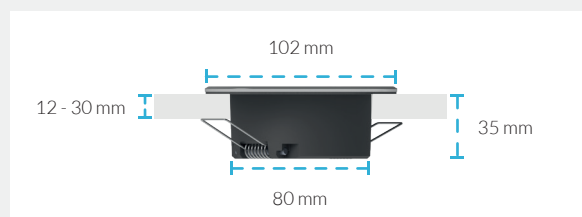

General

| | |
|--------------------|-------------------------------|
| Guarantee | 1 year |
| CE-standardization | Yes |
| *10 pack | One package contains 10 units |